

Installation instructions for Mobile Smart Screen



1. Please check the appearance of the product, whether there are scratches, cracks, and whether the accessories are complete when unpacking. If there are any such problems, please return the product.
2. If you need to return or exchange the product, please make sure that the product is intact, the packaging is complete inside and outside, and the product and accessories are not damaged.

Accessories:



(A bag BM3*16) screws x5



(B bag PWM4*6) screws x3



PM4*16mm screws x4



Foot pads x4



Cover plate x1



Screwdriver x1



Remote control x1




Power cord x1




Adapter x1

Friendly reminder: The PM4*16 screws and foot pads are used for anti-slip purposes, which can be installed according to your needs. Please refer to the "Anti-Slip Device User Manual" in the instruction manual for specific installation instructions. (If not installed, please keep them properly.)


01 Take out the bracket and the circular base.

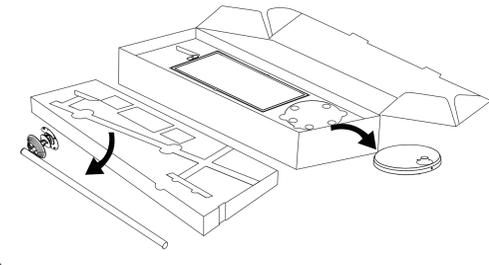


02 Place the base on the foam slot.

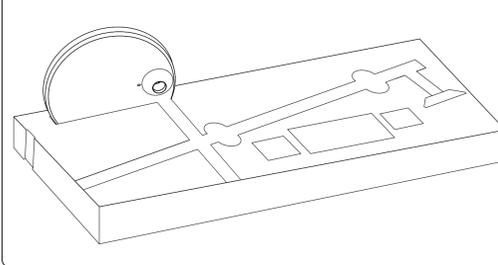


03 Thread the bracket power cord through the base and install the bracket on the base by aligning it with the slot position.

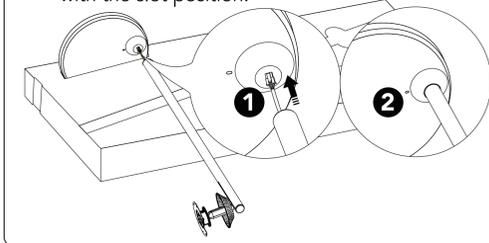


04 Lock the four screws (A bag BM3*16) on the base (tip: fix the diagonal position first).

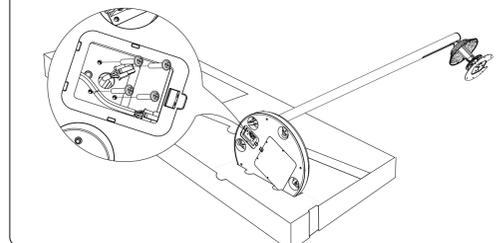


05 Insert the bracket power cord into the charging board base and then snap on the cover.

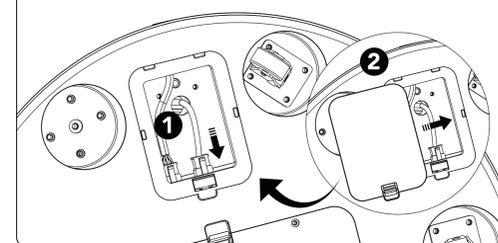


06 Open the dust cover.

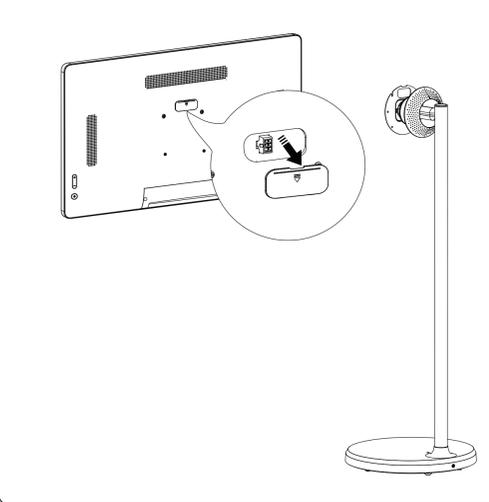


07 Align the two pre-installed screws on the VESA of the display with the U-shaped hole on the bracket, slide them in to fix them, lock the remaining two screws (B bag PWM4*6), and finally tighten the two pre-installed screws.

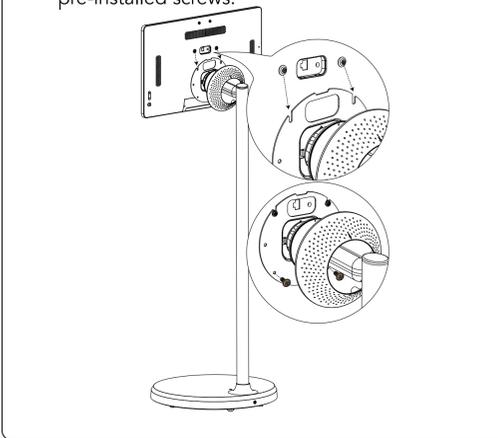


08 Check whether all four screws are locked in place, and then insert the bracket power cord into the display base.

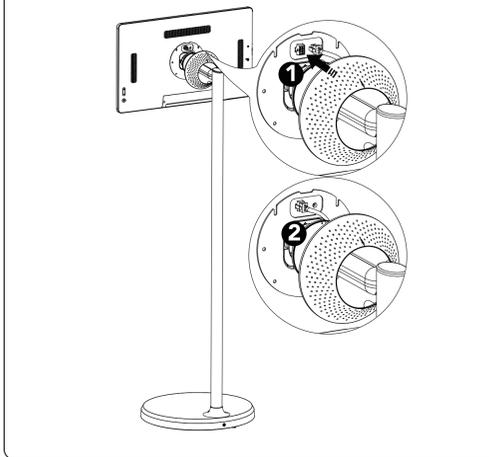

09 Rotate the display counterclockwise.

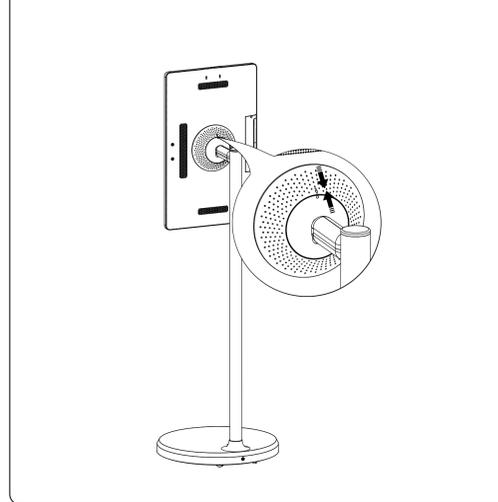

10 Align the camera hole with the display hole, lock the two (PM3*5) screws in place, remove the dust cover, and then plug the connection cable into the blue USB3.0 port of the display. The installation is complete.

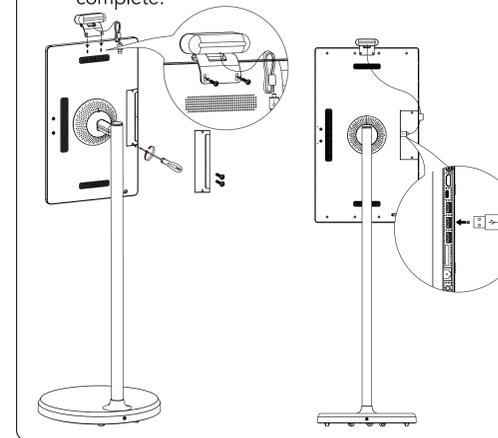

* Warm tip: If you need to install the camera, please install it on the right side of the horizontal display